

WINMAN SOLENOID VALVES

WSVP.S08 Valve Series



SAE Cartridge - 250 bar
Directional Valve - 3/2 Spool type

Description


A Solenoid operated, 3 way 2 positions, spool type, direct acting, screw-in hydraulic directional cartridge valve. In the de-energized mode, the SVP0.S08 allows flow bidirectionally between ports 1 and 2, while blocking flow at 3. In the energized mode, bidirectional flow is allowed between ports 2 and 3, while flow is blocked at 1. Even if port 1 may be fully pressurized, it is not intended to be used as the inlet. The rigid design using a 1-piece body contributes to minimize the effect of eccentricities in cavity and provides great reliability. Low pressure drop thanks to optimized flow path.

Technical Features


All external surfaces are zinc plated and corrosion-proof.
All valve parts are made of high strength steel.
Spool is hardened and micron finished to ensure minimal wear and extended service life.
Coil seals protect the solenoid system.
Manual override option.
Industry SAE common cavity.
Note: Standard sealing NBR (BUNA-N)

Performance Details

Note : For information about operating limits, please contact the factory.

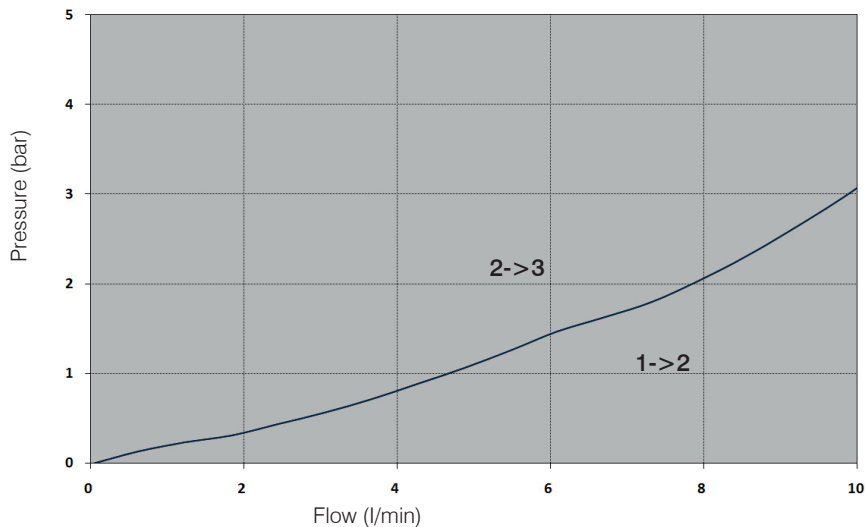

Symbols




Technical Data

Maximum operating pressure: 250 bar
Maximum flow: 10 l/min
Internal leakage: max 85 cm³/min @ 250 bar
Temperature: -30°C to 110°C
Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt
Minimum pull-in voltage: 85% of nominal
Orientation: no restrictions
Installation torque: 35-40 Nm
Seal kit code: SK.035 and SK.027 (coil)
Weight: 0.140 kg
NOTE: The performance chart illustrates flow handling capacity 1 to 2 (de-energized) and 2 to 3 (energized). P/Q curves are recorded at TOil = 40°C and 46 cSt


WINMAN SOLENOID VALVES

Cross Section

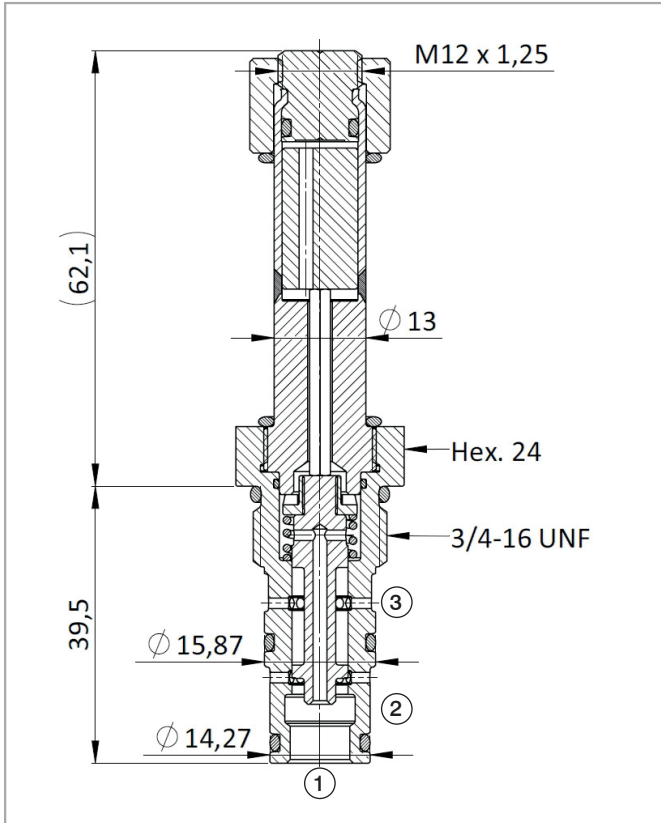

Cavity Details

SAE08-02

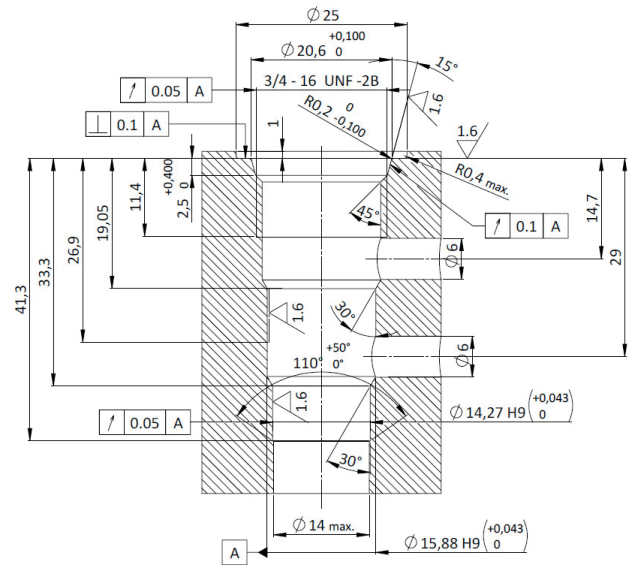

Ordering Code

W S V P • S 0 8 • 0 * • 1 0 0

Valve basic code

Cavity

S08 = 3/4-16 UNF with Ø15,87 and Ø14,27 nose sizes

Flow path
2 and 3 connected, 1 blocked (de-energized)
1 and 2 connected, 3 blocked (energized)

Manual override

Marking

0=Standard factory marking
Customized markings can be done upon request

Manual Override

Model Code	Type of override
0	No override
3	Push pin
4	Push knob
8	Screw

Coil



Use 22W coil to operate this valve.