


## GA-Serisi Hazırlık Ünitesi / GA-Series Preparation Unit

## GA315 Serisi Ters Akış Valfi / GA315 Series Reverse Flow Valve

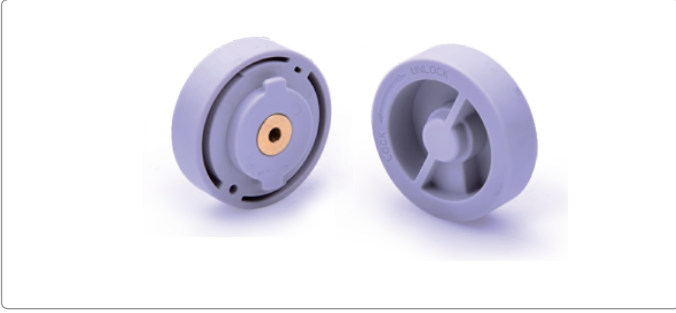

## Üretim Özelliği / Production feature

1. This reverse flow valve can be used with GA series regulator but can not be ordered individually.
2. When it is used with GA series regulator, one only needs to change the seal board in the back of regulator for the reverse flow valve. It is convenient to install and won't change the external dimension of regulator.


## Uygulanabilir ürün / Applicable product

Reflux valve type / Applicable products's type	G.A.F.R.L Combination	G.A.F.R.L Combination	G.A.F.R.L Combination	G.A.F.R.L Combination
GAR200-P1	GAC200	GAFC200	GAFC200	GAR200
GAR300-P1	GAC300, 400 ,600	GAFC300, 400 ,600	GAFC300, 400 ,600	GAR300, 400 ,600

## Sipariş Kodu / Ordering Code


When GA series regulator is assembled with the reverse flow valve, the valve can be ordered together with the standard product. What needs to do is to add "-K" to the end of the ordering code of the standard product. Please refer to relevant content for more detailed order method.

## İç Yapısı / Inner structure

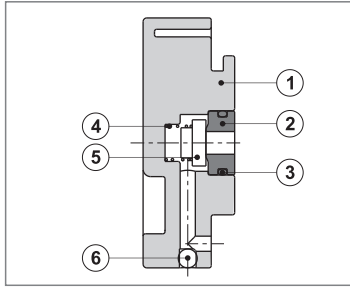

No.	Item	Material
1	Reverse flow valve's body	PBT
2	Plug	Brass
3	O-ring	NBR
4	Spring	SUS304
5	Gasket	NBR
6	Steel ball	SUS304

## Çalışma prensibi / Working principle

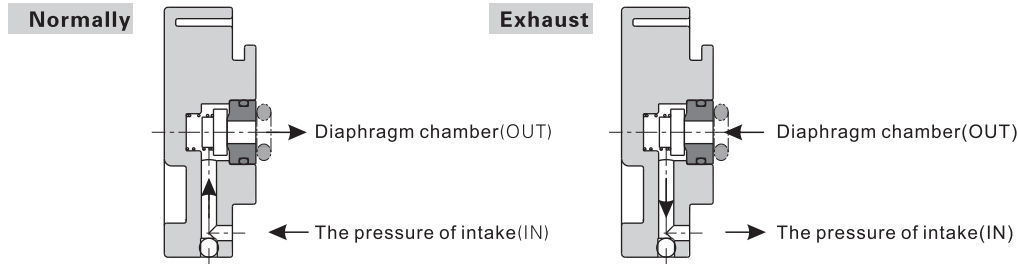

Normally, as the pressure of intake (IN) is higher than the set valve (pressure of outlet), the reverse flow valve closed; if the pressure of intake (IN) is cut off and starts exhaust, reverse flow valve opens. The pressure of diaphragm chamber is exhausted from IN orifice. At this moment, the pressure of diaphragm chamber decreases and the diaphragm is pressed down by the force from adjusting spring to open valve. The pressure from outlet is exhausted from IN port.

## Reflü valfini takma örneği / Example for assemble the reflux valve

Take GAR300 for example, it is in the same way to use products of other series.

