

## Stop Fittings

### ISPC-G SERIES



#### Product features


- Air flows is stopped from the tube if is released,the air flows again only after the tube is connected

#### Speciality

Fluid	Air (no other gases or liquids)
Operating Pressure	0-1.0MPa(150 psi)
Negative Pressure	-100Kpa(-29.5 in·Hg)
Operating Temperature	-60°C (32-140°F)
Applicable Tube	Polyurethane and Nylon

#### Dimension

MODEL	$\phi D$	G	$\phi D1$	L1	L2	
ISPC04-G01	4	G1/8	10	5.5	27.5	14
ISPC06-G01	6	G1/8	12	5.5	27	14
ISPC06-G02	6	G1/4	12	7.5	27	17
ISPC08-G01	8	G1/8	14	5.5	29	14
ISPC08-G02	8	G1/4	14	7.5	29	17
ISPC08-G03	8	G1/8	14	7.5	29	20
ISPC10-G02	10	G1/4	17	7.5	37	17
ISPC10-G03	10	G3/8	17	7.5	37	20
ISPC10-G04	10	G1/2	17	10	37	24
ISPC12-G02	12	G1/4	20	7.5	38	21
ISPC12-G03	12	G3/8	20	7.5	38	21
ISPC12-G04	12	G1/2	20	10	38	24

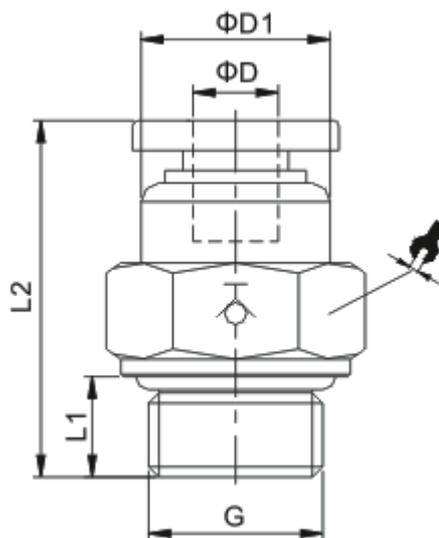

#### Graphical Symbols

