

## WINMAN SOLENOID VALVES

### WVL0.S08 Valve Series



SAE Cartridge - 250 bar  
NO Single Lock Pilot Operated - Poppet Type

#### Description

Solenoid operated, 2-way 2-positions, normally closed, piloted poppet type, screw-in cartridge valve. Typically used as a blocking or load holding device for high pressure circuits. When the coil is de-energized, the SVL0.S08 acts as check valve allowing free flow from 1 to 2, while blocking from 2 to 1. When the coil is energized the poppet lifts and opens the 2 to 1 flow path. In this operation mode, flow from 1 to 2 is severely restricted.


The rigid design using a 1-piece body contributes to minimize the effect of eccentricities in cavity and provides great reliability. Low pressure drop thanks to optimized flow path.

#### Technical Features


All external surfaces are zinc plated and corrosion-proof.  
All valve parts are made of high strength steel. Poppet is hardened and ground to ensure minimal wear and extended service life.  
Coil seals protect the solenoid system.  
Manual override options.  
Industry SAE common cavity.

#### Performance Details

Note : For information about operating limits, please contact the factory.

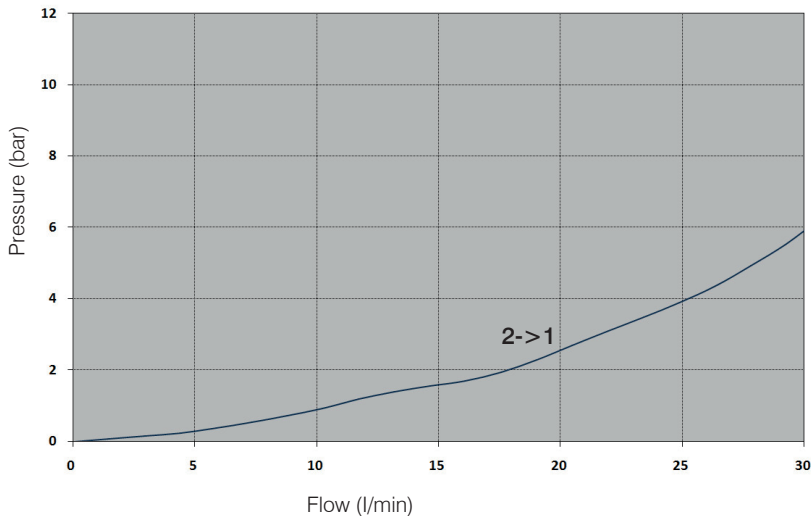

#### Symbols

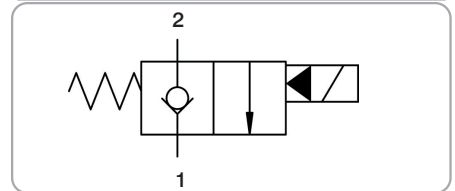

#### Technical Data

Maximum operating pressure: 250 bar  
Maximum flow: 30 l/min  
Internal leakage: max 5 drops/min @ 250 bar  
Response time: Energized 30 ms,  
De-energized 50 ms (typical 24V DC coil)  
Temperature: -30°C to 110°C  
Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt  
Minimum pull-in voltage: 85% of nominal  
Orientation: no restrictions  
Installation torque: 40-45 Nm  
Seal kit code: SK.030 and SK.027 (coil)  
Weight: 0.120 kg  
NOTE: The performance chart illustrates flow handling capacity in both directions (1 to 2 de-energized, 2 to 1 energized).  
P/Q curve is recorded at TOil = 40°C and 46 cSt

