


WINMAN 4H Serisi Kol Kumandalı Valfler



How to order:

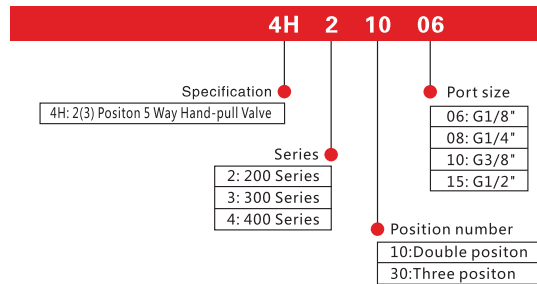


Symbol:



Specification:

Type	4H210-06	4H210-08	4H260-08	4H230-08	4H310-08	4H310-10	4H330-10	4H410-15	4H430-15
Position number	2 Position 5 Way			3 Position 5 Way	2 Position 5 Way		3 Position 5 Way	2 Position 5 Way	3 Position 5 Way
Fluid	Compressed air								
Acting type	Directly								
Port size(G)	input, output, exhausted=G1/8"	input, output=G1/4" exhaust=G1/8"			input, output, exhaust=G1/4"	input, output=G3/8" exhaust=G1/4"		input, output, exhaust=G1/2"	
Working pressure(MPa)	0~0.8								
Ambient temperature(°C)	-5 ~ 60								

Dimension(mm):

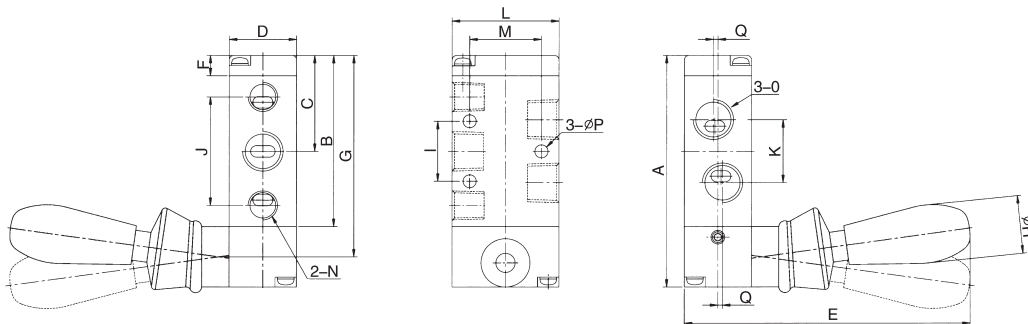

Type/Symbol	4H210-08(06)	4H230-08(06) (Auto-reset)	4H260-08	4H310-10(08)	4H330-10(08) (Auto-reset)	4H410-15	4H430-15 (Auto-reset)
A	80.5	95	84.5	96	115	126	147
B	56.5	75.5	56.5	72	91	102	123
C	31.5	31.5	31.5	40	60	55.5	76.5
D	22	22	26	27	27	34	34
E	95	95	95	100	100	110	110
F	6.5	6.5	6.5	7.5	7.5	7.5	7.5
G	66.5	85.5	72.5	84	103	114	135
H	18	18	21	18	18	18	18
I	20	20	21	24	24	28	28
J	36	36	37	45	45	63	63
K	21	21	23	24	24	36	36
L	35	35	35	40	40	50	50
M	21	21	-	27	27	35	35
N	G1/8	G1/8	G1/8	G3/8	G3/8	G1/2	G1/2
O	G1/4(G1/8)	G1/4(G1/8)	G1/4	G3/8(G1/4)	G3/8(G1/4)	G1/2	G1/2
P	4.3	4.3	4.2	4.3	4.3	5.5	5.5
Q	1.5(-)	1.5(-)	-	2(-)	2(-)	-	-