


**WINMAN A,B Serisi Şartlandırıcı Grupları / A,B Series Preparation Unit**
**AFR, BFR Serisi Filtre & Regülatör / AFR, BFR Series Filter & Regulator**

**Özellikler / Specification**

Model	AFR1500	AFR2000	BFR2000	BFR3000	BFR4000
Fluid	Air				
Port size [Note1]	1/8"	1/4"	1/4"	3/8"	1/2"
Filtering grade	40 µm or 5 µm				
Pressure range	Semi-auto and automatic drain:0.15~0.9MPa(20~130Psi) Manual drain:0.05~0.9MPa(7~130Psi)				
Max. Pressure	1.0MPa(145Psi)				
Proof pressure	1.5MPa(215Psi)				
Temperature range	-5~70°C(unfreeze)				
Capacity of drain bowl	15CC		60CC		
Weight	260g		400g		

[Note1] PT thread, G thread and NPT thread are available.

**Sembol / Symbol**

**Üretim Özelliği / Production Feature**



1. The structure is delicate and compact, which is convenient for installation and application.
2. The pressed-in self-locking mechanism can prevent the abnormal movement of the set pressure caused by external interfere.
3. The pressure loss is low and the efficiency of water separating is high;
4. In addition to standard type, lower pressure type is optional(The highest adjustable pressure is 0.4MPa).

**Sipariş Kodu / Ordering Code**

AFR 2000 M    1 W

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Model	② Port size	③ Drain type	④ Type code	⑤ Accessories	⑥ Pressure gauge	⑦ Scale	⑧ Filtering grade	⑨ Thread type
AFR: A Series Filter & regulator	1500: 1/8" 2000: 1/4"	Blank: Semi-auto drain M: Manual drain	Blank: Standard (0.9MPa)	Blank: Bracket J: No bracket	Blank: Pressure gauge N: No pressure gauge	1: MPa 2: psi 3: bar 4: kgf/cm <sup>2</sup> & psi	Blank: 40 µm W: 5 µm	Blank: PT (Scale: Mpa or kgf/cm <sup>2</sup> & psi) G: G(Scale:bar) T: NPT(Scale:psi)
BFR: B Series Filter & regulator	2000: 1/4" 3000: 3/8" 4000: 1/2"	Blank: Semi-auto drain M: Manual drain A: Automatic drain	L: Lower pressure (0.4MPa)					

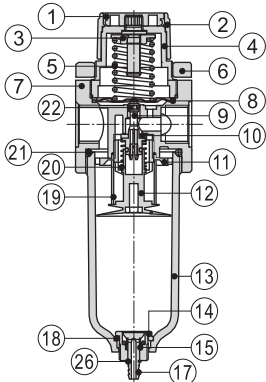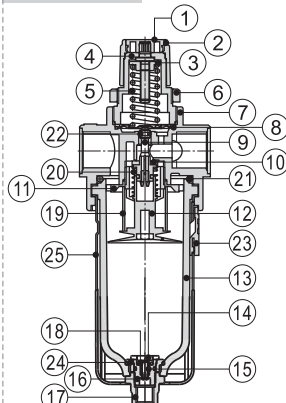**İç Yapısı / Inner structure**
**AFR Series**

**BFR Series**


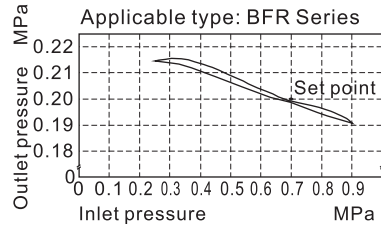
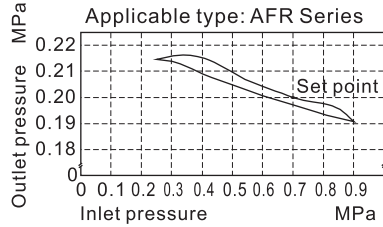
No.	Item	Material	No.	Item	Material
1	Push button	POM	14	Drain kit	POM
2	Adjusting button	POM	15	Return spring	Stainless steel
3	Adjusting nut	Steel	16	Drain seat	POM
4	Adjusting seat	POM	17	Drain pillar	POM
5	Adjusting spring	SWC	18	Drain O-ring	NBR
6	Fixed ring	POM	19	Filter element	5 µm Makrolon fiber 40 µm Agglomerated by bronze grain
7	Body	Aluminum alloy		20	Return spring
8	Diaphragm	SUS304 & rubber	21	Drain bowl O-ring	NBR
9	Balance needle	POM	22	Needle O-ring	NBR
10	Needle gasket	Aluminum alloy & rubber	23	Bowl guard switch	POM
11	Air guider	POM	24	Gasket	POM
12	Umbrella baffle	POM	25	Bowl guard	PA66
13	Drain bowl	PC	26	Clip	Spring steel

**WINMAN A,B Serisi Şartlandırıcı Grupları / A,B Series Preparation Unit**



AFR, BFR Serisi Filtre & Regülatör / AFR, BFR Series Filter & Regulator

Basınç ve özellik akışı / Pressure and feature flow

**Pressure chart**



**Flow chart**

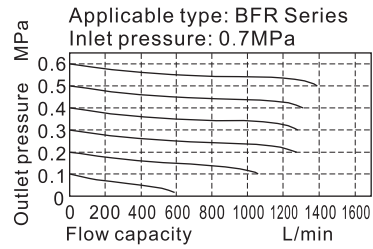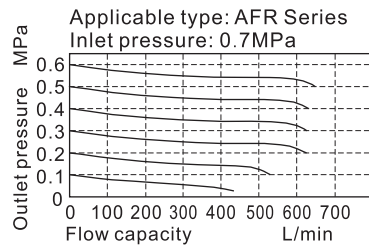


**Tahliye modunun seçimi / Selection of drain mode**

The drain modes of different series are different. Please refer to P211 for details.

**Boyutlar / Dimensions**

**AFR Series**

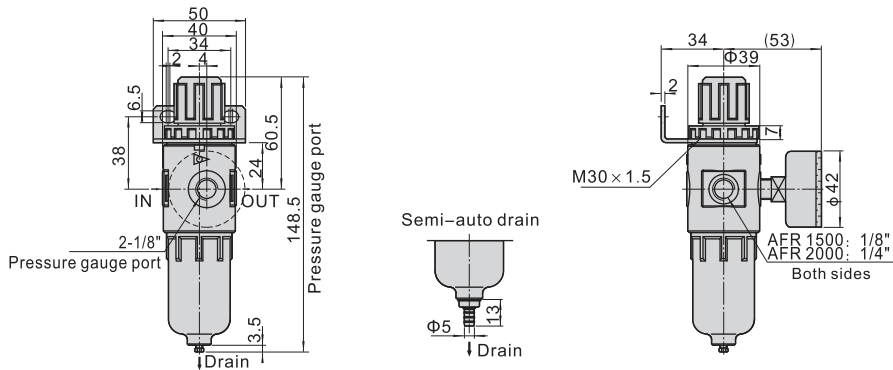

**BFR Series**

